

# Signal Kits

CSK-B signal kits are particularly suitable for connecting screened signal cables in industry, rail and mass transit. Individual splices can be supplied as separate kits to cover a wide range of sizes with minimal stock


## Features

- Quick, easy installation
- Exceptionally good electrical insulation
- Good mechanical load-bearing ability
- No maintenance time necessary
- Usable immediately
- Include components for continuing electrical earth and shield
- Various connection options
  - crimpseal
  - dual wall heat shrink tubing with crimp connector



## DSG-Canusa Signal Kits

Suitable for 1.5-2.5 mm<sup>2</sup> copper conductor  
Types YSLCY, LSYCVY, ZPFU, SZRMtk VM-J 0.6/1kV armoured.

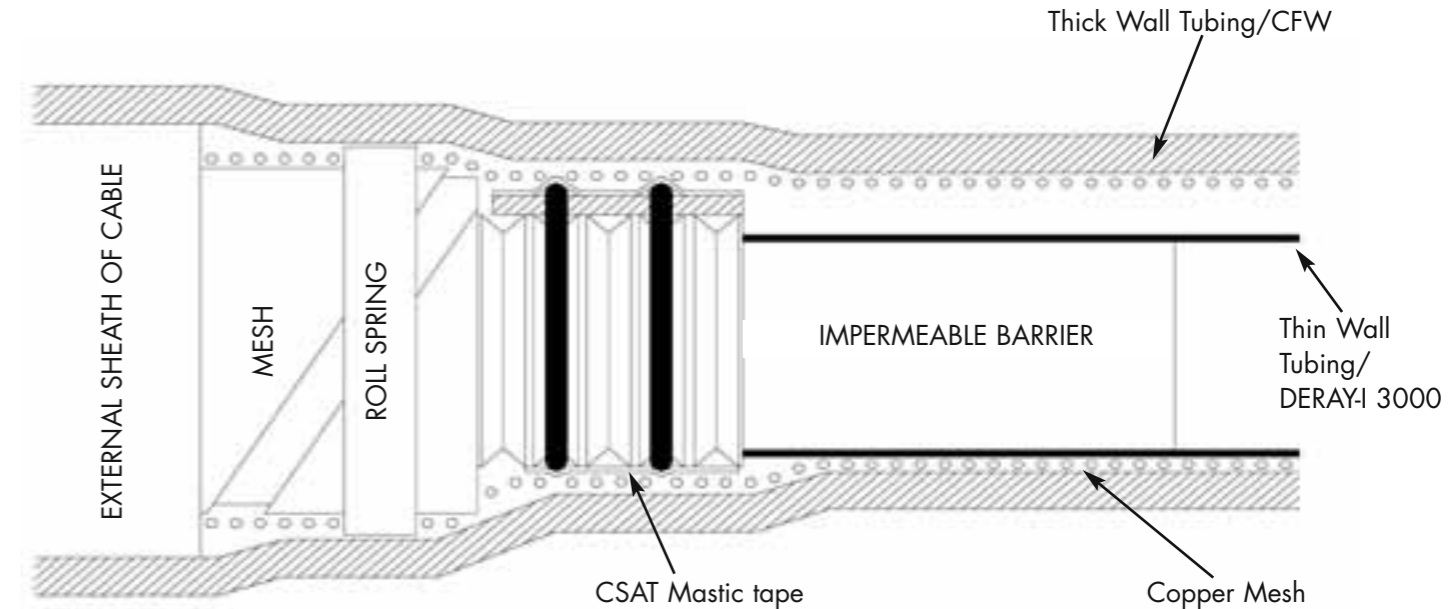

**CFTV** - high shrink ratio tubing with thermochromatic paint and high performance adhesive gives excellent mechanical and environmental protection

**Braid** - tinned copper non corroding for continuation of screen

**Roll spring** - gives good mechanical and electrical contact with no insulation damage

**CSAT** - mastic designed to perform even during flexing and vibration

**DERAY-I 3000** - heat shrink tubing to replace inner insulation layer and continue waterproof seal

KIT NAME	CABLE RANGE (NO. OF PAIRS)
CSKB - 1	4 - 7
CSKB - 2	10 - 22
CSKB - 3	28 - 32